

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 783 217 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
09.07.1997 Bulletin 1997/28

(51) Int. Cl.<sup>6</sup>: H04L 12/46, H04Q 7/24,  
H04J 3/22

(21) Application number: 96308951.1

(22) Date of filing: 10.12.1996

(84) Designated Contracting States:  
DE FR GB IT SE

(30) Priority: 02.01.1996 US 581830

(71) Applicant: Lucent Technologies Inc.  
Murray Hill, New Jersey 07974-0636 (US)

(72) Inventors:  
• Miska, Richard A.  
Belle Mead, New Jersey 08502 (US)


• Myers, Albert E.  
Matawan, New Jersey 07747 (US)

(74) Representative: Buckley, Christopher Simon  
Thirsk  
Lucent Technologies (UK) Ltd,  
5 Mornington Road  
Woodford Green, Essex IG8 0TU (GB)

(54) Method and apparatus for transport of communication signals over a public network

(57) In a method and apparatus for transmitting signals at different rates between an originating device (22) and a destination device (e.g.30) the originating device generates a communication signal, including routing data, for transmitting the communication signal at a native rate associated with the originating device. The communication signal is received by a switch (21) which analyzes the routing data of the signal to identify transmission rates recognizable by the destination device and, if necessary, a transmission path for routing the signal across a backbone network (54) at the native rate. The system then determines whether to re-encode the signal for direct transmission at a different rate recognizable by the destination device, or to maintain the signal at the native rate for transmission either directly to the destination device or across the backbone network. The signal is then transmitted. A destination switch (23) at the destination end analyzes the communication signal to determine the final destination point; if necessary, it re-encodes the communication signal for transmission at a rate which is recognizable by the final destination point, and then transmits the signal to the final destination (e.g.30).

FIG. 2

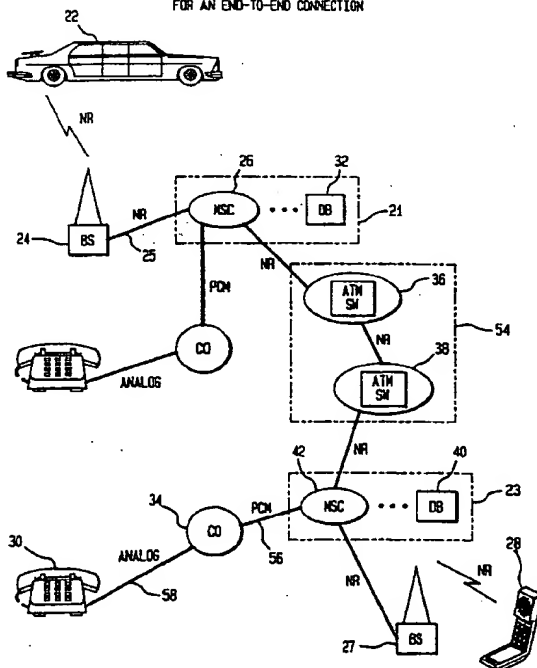ARCHITECTURAL COMPONENTS  
FOR AN END-TO-END CONNECTION

EP 0 783 217 A2

BEST AVAILABLE COPY

## Description

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

The present invention relates to a process and system for transmission of a communication signal between a source and destination and, more particularly, for transmission of communication signals of at least a predetermined plurality of rates and for treatment of the communication signal at the source and destination ends of the transmission.

#### 2. Description of the Related Art

The process for transmitting a communication signal between two spaced apart locations over a communications link or network is both well known and performed daily throughout the world, as when one initiates a voice telephone call.

In conventional telephony, when a user attempts to place a wireless call, as from a mobile or cellular telephone, the call signal is encoded as a digital wireless signal for transmission at a particular rate (hereinafter referred to as the "native rate") determined by the particular air interface protocol being used by the telephone. Every such phone operatively encodes communication signals at a native rate specific to that telephone and typically determined by the unit's manufacturer. For example, a typical cellular phone encodes signals for transmission at a rate of 8 kilobits per second (Kbps), a typical analog wireline phone encodes signals for transmission at a rate of 56 Kbps, and a typical digital wireline phone encodes signals for transmission at a rate of 64 Kbps. This encoded signal is then transmitted by the phone to a local cell at the native rate. The cell is basically a radio receiver which receives the signal and transmits it to a switch associated with that particular cell through a hard-wired connection. Cell technology is well-known and further discussion of such is not deemed necessary. The switch connected to the cell receiving the transmission from the initiating or originating phone is referred to as the "originating switch" and is also connected with numerous other cells from which it also receives wireless communication signals for transmission to individual receivers, e.g., cellular telephones. The switch may also be connected to one or more central offices (CO's) via the Public Switched Telephone Network (PSTN), through which it receives and transmits wireline communication signals to individual receivers, e.g., an analog wireline telephone. The originating switch automatically transforms the wireless signal into a higher bit rate coding signal for wireline transmission, e.g., at 56 Kbps, at which time the destination for the signal is determined. If the destination receiver is connected to a different switch, then a suitable transmission path is identified, and the signal is transported across a backbone network to a remote destination switch. The

backbone network is used to connect and provide a communications path between switches positioned all over the world. The destination switch receives the signal transmitted at the wireline transmission rate and identifies the final destination of the signal. If the final destination is a mobile telephone or receiver, the signal is re-encoded into a rate recognizable by the destination switch for wireless transmission to the destination mobile phone. If the destination is a wireline receiver, the signal is transmitted to the destination receiver at a wireline transmission rate recognizable by that device. Thus, it is possible for a particular signal to be encoded from one transmission rate to a second rate and then, at the destination back to the first transmission rate again. In fact, the conventional system used for backbone transport of a communication signal described above encodes a wireless to wireless transmission, for example, into its native rate twice, i.e., once at each end of the transmission path. However, each encoding of the signal by a coder typically degrades the quality of the signal transmission, resulting in a lower Mean Opinion Score (MOS), a conventional, well-known rating system of signal quality. Furthermore, low bit rate speech coders used in conventional phones also introduce distortion and delays which can result in unacceptably degraded service. Because current technology encodes the signal at the native rate twice during a single wireless to wireless transmission, the resulting signal is significantly distorted and delayed.

Furthermore, conventional arrangements are incapable of properly handling the receipt of signals transported across a backbone network at rates other than the accepted wireline rates, especially when special treatment of the signal is required, such as call forwarding to another location or to a voice mailbox.

Conventional switches do not encode the communication signal back to the native rate for a wireless transmission until immediately prior to transmission to the wireless receiver. As a consequence, all analysis of the communication signal to determine its intended destination is performed at the wireline rate. Should a conventional destination switch receive a communication signal transported across a backbone network at a rate other than the wireline rate, it would be unable to properly handle the signal. In order to improve the signal quality of a communication signal by transmission across a backbone network at its native rate, the operation of the switches must also be adapted to transmit, receive and process signals transmitted at a plurality of rates.

### SUMMARY OF THE INVENTION

The present invention provides a method and apparatus for improving the quality of a communication signal transmitted across a backbone network between a source and destination and the handling of the communication signal at the ends of the transmission path. In addition, the present invention does not negatively affect the quality of a transmission involving a wireline

destination. The signal quality is improved by reducing the number of times that a wireless to wireless transmission of a communication signal is encoded to its native rate. The method and apparatus further provides for transmission, receipt and processing of communication signals at a native rate particular to the transmission device, thus eliminating the need for encoding of the signal to a wireline rate at an originating switch prior to analysis of the signal and transmission to an intended destination. Such signals include, by way of example, wireless cellular signals, wireline analog signals, wireline digital signals, and multimedia signals; each type of signal being encoded for transmission at a native rate particular to the transmission device, similar devices encoding signals for transmission at similar rates. Transmission of the signal across a backbone network at its native rate eliminates the need for encoding of the signal at both ends of a wireless to wireless transmission, since the call will be received by an originating switch at the native rate of the originating transmitting device and then transmitted across the backbone network to a destination switch and through an air link to a destination wireless receiver at, in such case, the same native rate.

Because the signal in a wireless to wireless communication will be encoded to its native rate only once, i.e., by the originating telephone or transmission device, distortion and delay of the signal is significantly reduced as compared to transmissions using conventional techniques. Furthermore, if the destination is a wireline receiver, the quality of the signal transmission will not suffer as the signal will be treated in a similar manner to conventional systems; the only difference will be the particular time or point at which the signal is encoded to a wireline transmission rate.

The present invention also adapts the switches connected to the backbone network so as to be capable of handling receipt of signals at a plurality of rates and of directing the signals to the proper final destination, including signals which require special treatment, such as call forwarding to another phone handled by the same switch, to a voice mailbox, or even to a destination handled by another switch.

The present invention thus provides a method and apparatus for transmitting signals at a plurality of rates between a source transmission device and a destination receiver. The apparatus includes an originating device, such as a telephone, for generating a communication signal including routing data and for transmitting the communication signal at a rate particular to the originating device, i.e., the native rate. The communication signal is received by a local switch which analyzes the routing data of the communication signal to determine the destination device, and if the destination device is connected to a remotely located or "long distance" switch then a transmission path for routing the signal across a backbone network at the native rate of the originating device is determined. Based upon these determinations, the local switch then determines whether the

communication signal should be transmitted across the backbone network at the native rate, or transmitted directly to the destination device at the native rate, or converted to a pulse code modulation (PCM) signal for transmission to the destination device. At the destination end, the destination switch for receiving the communication signal analyzes the signal in a similar manner, irrespective of the rate at which the signal was received, to identify the final destination point or receiver. If it is determined during this analysis that the final destination is unable to receive the signal at the native rate, then the destination switch encodes the signal for transmission at a rate which is recognizable by the final destination point and transmit the signal to that destination point. If the analysis reveals that the destination is a wireless receiver which has not answered a page signal, then the user profile of the destination receiver is examined to determine whether a special treatment service for incoming communication signals, such as call forwarding, has been activated; if so, the signal is re-routed to the ultimate destination at the native rate at which it was originally encoded.

The present invention is thus capable of handling the transmission of communication signals between a source transmitting device and a destination receiving device with a vast improvement in signal quality for wireless-wireless transmissions and without degrading the signal quality in other types of transmissions (e.g., wireless-wireline and wireline-wireline transmissions) by adapting the switches to transmit and receive signals transmitted across a backbone network at a wide range of transmission rates instead of only signals transmitted at a wireline rate. Significant advantage is realized by virtue of elimination of an additional encoding step that is used by conventional systems and a reversal in the logic upon which the operation of conventional systems is based. The present invention further modifies the switches used in such transmissions to handle the reversal in logic and the special treatment of transmissions transported across a backbone network at variable rates.

Other objects and features of the present invention will become apparent from the following detailed description considered in conjunction with the accompanying drawings. It is to be understood, however, that the drawings are designed solely for purposes of illustration and not as a definition of the limits of the invention, for which reference should be made to the appended claims.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

In the drawings, in which like reference numerals identify similar elements throughout the several views:

FIG. 1 diagrammatically depicts a communication system supporting wireless and wireline transport across backbone networks, certain switches being able to send signals at a native rate;

FIG. 2 is a schematic block diagram of a communications transmission path arrangement in accordance with the present invention; and

FIG. 3 is a flow chart illustrating a sequence of operations performed by an originating switch in accordance with the present invention; and

FIG. 4 is a block diagram of a mobile communications switch which forms a part of the system of the present invention.

#### DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EMBODIMENTS

FIG. 1 depicts an interconnected system of devices operable for transporting wireline and wireless communication signals across a backbone network and identified by the general reference numeral 10. The system 10 includes "switch A" 12 which supports wireless access, "switch B" 14 which supports wireline access, and "switch C" 16 which supports wireless access. Switches A and C, are connected, for example, by an Asynchronous Transfer Mode (ATM) backbone network 18. In addition, switches A and B are connected to one another, and switches B and C are connected to one another, through, for example, a circuit switched backbone network 20. The structures and components of the ATM and circuit switched backbone networks 18, 20 are well known in the art, and it should in any event be understood that references to these particular types of networks are for purposes of example only and are not intended to limit the method or apparatus of the present invention. Thus, any backbone network can alternatively be employed to connect the switches, an ATM backbone network being currently preferred due to its ability to handle signals of variable rates such as multimedia signals. The wireless switches A and C are thus capable of sending signals at a native rate across an ATM backbone network. Furthermore, although FIG. 1 only illustrates the use of three switches supporting either wireless and wireline access, in practice any number of switches may be connected to the backbone network, such switches variously supporting many different and distinct types of access.

FIG. 2 schematically depicts the various devices and components forming a typical end to end communication connection in accordance with the present invention and defining a complete transmission path, including connections for any combination of wireless and wireline transmissions. The operation of the system shown in FIG. 2 will now be described in conjunction with the flow chart of FIG. 3 which illustrates the method steps of the present invention practiced at an originating and a destination switch 21 and 23, respectively, during a transmission originating from a wireless source 22. It is nevertheless to be understood that the present invention is not intended to be restricted to transmissions from a wireless source but, rather, is equally applicable to transmissions originating and terminating at any type of transmitter and receiver.

When a user attempts to initiate a communication or call from a mobile cellular phone 22 as in an automobile, the mobile phone 22 is placed in an off-hook mode and a call set-up request, i.e., a coded signal as indicated in step S2, is encoded at a native transmission rate particular to the mobile phone and is wirelessly transmitted. The call set-up request is received at a base station or cell 24 which determines, in step S4, whether the resources are available to handle the transmission (e.g., whether a communication channel is open or available), and transmits a signal back to the mobile phone 22 indicative of the results of this determination. The base station 24 is connected through a wireline 25 to a local switch 21 which may also determine the availability of resources to handle the transmission. If no resources or channels are available, then a signal rejecting the request is transmitted back to the phone and the transmission is blocked, as indicated in step S6.

If the resources are available to handle the transmission, a dial tone is transmitted by the base station 24 back to the mobile phone 22, allowing the user to enter a telephone number or routing code. The routing code is encoded for transmission by the phone at the native rate (NR) particular to that phone. Each device operable for transmitting a communications signal encodes the signal for transmission at a manufacturer-selected native rate particular to the device and determined by the particular air interface protocol used by the device; different rates of transmission are typically used for different types of signals such as cellular phone signals, wireline analog signals, wireline digital signals, multimedia signals, etc.

The routing code is transmitted at the native rate from the mobile phone 22 to the base station 24 and then across wireline 25 to the Mobile Switching Center (MSC) 26 of local switch 21. The connection between cell 24 and MSC 26 is conventional and well-known in the art. Local switch 21 analyzes the routing code to determine whether the desired destination is local or requires transmission over a long distance, step S8. As is well-known, each switch acts as a transmission router for numerous individual transmitter and receivers (e.g., telephones); thus, numerous receivers may receive communication signals through a particular switch. Each such receiver is identified by a unique telephone number or routing code and is associated with a respective user profile. The user profile for each receiver is stored in a database 32 within the particular switch providing access to the receiver, and includes information identifying the receiver and the services available thereto. As used herein, a local call is a call that can be handled solely by the originating local switch 21, i.e., the source transmitter device and the destination receiver are both accessible through the same switch.

If the intended destination requires a local call, then the local switch 21 must determine whether the destination receiver is accessed through wireline or wireless transmissions by analyzing the user profile for the respective routing code. At this point, local switch 21

must determine whether the signal should be converted from or remain at its native rate by analyzing the routing code, the user profile or both.

As the subsequent handling of the communication signal from this point is the same for all switches, the following description will, for convenience, and by way of example, assume that a long distance communication between remote switches is required.

When it is determined that the call is intended for a destination handled by a remote switch, the MSC 26 determines and plots a transmission path for the call across a backbone network 54 to the remote switch 23 servicing the particular destination receiver identified by the routing code. The transmission across the backbone network 54 occurs at the native rate established by the source transmitting device or mobile phone 22, step S10. The routing of the call is determined by the local or originating switch 21 based upon the received routing code. The call may be routed through a number of intermediate ATM switches 36, 38 along the backbone network 54 until it reaches the destination switch 23. At the destination switch 23, which preferably comprises a MSC 42 and an associated database 40, the communication signal is analyzed to determine whether the intended destination receiver is accessible through a wireless or a wireline transmission. This analysis is performed by reviewing the destination user profile specific to the routing code and stored in the data base 40, step S12. The destination switch 23 then determines whether the signal is to be converted from its native rate to a different rate or to pulse code modulation (PCM) for transmission to the destination device. Illustratively, it is assumed that the destination receiver is an analog wireline phone 30. Accordingly, the transmission is converted to a PCM signal, step S14, and routed through the public switched telephone network (PSTN), step S16, along a wireline 56 through a central office (CO) 34 to the destination receiver 30 associated with the routing code. As the destination receiver 30, in this example, is an analog telephone, the PCM signal is converted to an analog signal at the central office 34 for transmission along a wireline connection 58 to the receiver 30.

If, on the other hand, the destination device must be reached through a wireless transmission, then the MSC 42 of the destination switch 23 transmits a page signal through the destination base station cell 27 to the destination receiver 28 (e.g., a cellular phone) to determine whether it is currently available to receive the transmission, step S18. If it is available, receiver 28 answers the page signal by transmitting a responsive signal indicating such to destination switch 23 through base station cell 27, step S24. Destination switch 23 then checks whether a digital channel is available for transmission of the communication signal to the destination receiver 28, step S22. If a digital channel is available, a connection is established to complete a transmission path between the originating mobile phone 22 and the destination receiver 28, and the communication signal is encoded

and transmitted at the native rate from the transmitting device 22 to the wireless destination receiver 28, step S24. As may be appreciated, this signal has been encoded to its native rate only once, at the originating transmitting device 22 and thus is of notably higher quality than a transmission signal that has been encoded more than once as in conventional systems.

If no digital channel is available, step S22, destination switch 23 checks whether an analog channel is available at step S26. If so, the transmission signal is decoded and converted to an analog signal, step S28, and the call connection is completed, step S30, i.e., the now-analog signal is transmitted to the wireless receiver 28. If no analog channel is determined to be available in step S26, then a message or signal is transmitted to originating transmitting device 22 indicating that the transmission cannot be completed (for example, an audio message that the destination device is not available to receive the call, and the transmission is terminated, step S32).

Returning to step S20, if the page signal is not answered or is answered with a negative response indicating unavailability of the destination receiver 28 to receive the transmission, then the MSC 42 checks the destination user profile identified by the routing code and stored in the database 40 of the destination switch 23, step S34, to determine whether the intended transmission is to be handled in some special manner, for example, through call forwarding to another device or location. Absent such special handling instructions, the originating device 22 of the transmission is notified that the transmission cannot be completed and the call is terminated, step S32.

Returning to step S34, if the database 40 indicates that there is a special handling request for the destination indicated by the routing code, then the destination switch 23 determines whether the call should be converted to a PCM signal or whether the call should remain at the native rate. This determination is based upon an analysis of the user profile of the destination receiver 28 and of the alternate destination indicated by the special handling instructions, as for example, whether the call must be re-routed to another switch or to the PSTN, step S36.

If it is determined that the call need not be re-routed to another switch or to the PSTN, the special treatment is applied, step S38, and the call is connected to its destination, e.g., to another wireless phone, a voice mailbox, etc. If re-routing is necessary, it is then determined, step S40, whether such re-routing is to the PSTN or to a remote switch. For re-routing to the PSTN, steps S14 and S16 are performed to convert the signal to PCM and connect the call to its wireline destination. For re-routing to a destination handled by another switch, a transmission path to the new or alternate destination switch is plotted and the call, still at the native rate, is re-routed, step S10, across the backbone network to the alternate destination switch associated with the special treatment instructions for the destination receiver.

The arrangement of the present invention thus does not encode a communication signal for transmission at a rate different from the native transmission rate at which it is originally encoded by the source at least until the ultimate destination has been determined. Only if that destination cannot accept or recognize a transmission at that native rate is the signal then encoded to a different and recognizable rate immediately prior to its transmission. The system of the present invention is accordingly capable of handling signals transmitted at at least a predetermined plurality of rates and operates on the premise that all communication signals are normally transmitted between similar devices, i.e., devices which encode for transmission and which recognize signals transmitted at like rates. Re-encoding of the signal for ultimate transmission to the final destination is only performed at the destination switch if necessary to enable its receipt by the receiving device. Consequently, unnecessary encoding of a signal transmitted between similar devices is avoided and additional signal distortion and degradation caused by unnecessary encoding is eliminated. Thus, the present invention operates in contradistinction to the premise of conventional systems which assume that all communication signals are directed to analog wireline receivers and all signals directed to non-analog wireline receivers require re-encoding of the signal as a final step prior to transmission to the ultimate destination.

FIG. 4 depicts the components of a typical switch 51 for use in the practice of the present invention, which may be used as switches 21 and 23 shown in FIG. 2. Each such switch 51 includes a call processing system 50 that operatively attempts to either complete or initiate a connection with an intended destination, as indicated by the box labelled call connection 52, or to route the transmission across a backbone network to a destination determined through analysis of the communication signal; the interswitch routing of a transmission being illustrated by the interswitch routing or backbone network 54 in FIG. 2.

Each switch also includes a translation table 56 for decoding the communication signal destination routing code received from the source for use in plotting a transmission path, a PCM converter 58 for converting the communication signal to a pulse code modulation signal to permit connection of a wireline transmission with a central office for ultimate transmission to the destination receiver, an analog converter 60 for transmission of the communication signal over an analog communication channel, and a user profile 62 which stores a respective user profile for each of the many destination routing numbers that are directly connected to and handled by the specific switch. The user profile 62 identifies the type of service to be provided for each destination receiver connected to the switch, any special treatment accorded to transmissions for each destination receiver, and whether any special treatment that is available to the source has been activated for determining a final destination through either call connection or interswitch

routing for transmission completion.

While there have been shown and described and pointed out fundamental novel features of the invention as applied to preferred embodiments thereof, it will be understood that various omissions and substitutions and changes in the form and details of the devices illustrated, and in their operation, may be made by those skilled in the art without departing from the spirit of the invention. For example, it is expressly intended that all combinations of those elements and/or method steps which perform substantially the same function in substantially the same way to achieve the same results are within the scope of the invention. It is the intention, therefore, to be limited only as indicated by the scope of the claims appended hereto.

#### Claims

1. A method for transmitting signals between a source device and at least one of a plurality of destination devices, the source device being capable of encoding a signal into an encoded signal identifying at least one of a plurality of destination devices as an intended destination device, the encoded signal having a native rate of transmission, each of the plurality of destination devices being capable of receiving signals having particular characteristics, the method comprising:
  - a. analyzing the encoded signal to determine the intended destination device for the encoded signal;
  - b. identifying an ultimate destination device designated by the intended destination device for receipt of signals from a source device;
  - c. identifying a switch device associated with the ultimate destination device;
  - d. determining a route of signal transmission from the source device to the switch device;
  - e. transmitting the encoded signal at the native rate from the source device to the switch device along the route of signal transmission;
  - f. determining the particular characteristics of signals that are capable of being recognized by the ultimate destination device;
  - g. analyzing characteristics of the encoded signal and the particular characteristics of signals that are capable of being recognized by the ultimate destination device to determine whether the characteristics of encoded signal are substantially the same as the particular characteristics of signals that are capable of being recognized by the ultimate destination device;
  - h. upon determining that the characteristics of encoded signal are substantially the same as the particular characteristics of signals that are capable of being recognized by the ultimate destination device in said analyzing step (g), transmitting the encoded signal from the switch

device to the ultimate destination device; and  
 i. upon determining that the characteristics of encoded signal are not substantially the same as the particular characteristics of signals that are capable of being recognized by the ultimate destination device in said analyzing step (g):

1. re-encoding the encoded signal at the switch device into a re-encoded signal having characteristics substantially the same as the particular characteristics of signals that are capable of being recognized by the ultimate destination device; and
2. transmitting the re-encoded signal from the switch device to the ultimate destination device.

2. The method of claim 1, wherein the ultimate destination device is the intended destination device.
3. The method of claim 1, wherein the ultimate destination device is a destination device different than the intended destination device.
4. The method of claim 1, wherein the signal characteristics of the encoded signal being analyzed in said analyzing step (g) is the transmission rate and the particular characteristics of signals that are capable of being recognized by the ultimate destination device being analyzed in said analyzing step (g) is a rate of signal reception.
5. The method of claim 1, wherein said step of determining the particular characteristics of signals that are capable of being recognized by the ultimate destination device is performed at the switch device.
6. The method of claim 1, wherein said step of analyzing characteristics of the encoded signal and the particular characteristics of signals that are capable of being recognized by the ultimate destination device is performed at the switch device.
7. The method of claim 1, further comprising:
  - transmitting an answer signal to the source device in response to receipt of one of the encoded signal and the re-encoded signal by the ultimate destination device to indicate to the source device that the ultimate destination device is capable of receiving the signal from the source device;
  - establishing a communications connection between the source device and ultimate destination device along the route of signal transmission.

8. An apparatus for transmitting signals between a

source device and at least one of a plurality of destination devices, the source device being capable of encoding a signal into an encoded signal identifying at least one of a plurality of destination devices as an intended destination device, the encoded signal having a native rate of transmission, each of the plurality of destination devices being capable of receiving signals having particular characteristics, the apparatus comprising:

first analyzing means for analyzing the encoded signal to determine the intended destination device for the encoded signal;  
 an ultimate destination device designated by the intended destination device for receipt of signals from a source device, said ultimate destination device being capable of recognizing signals having particular characteristics;  
 first identifying means for identifying an ultimate destination device designated by the intended destination device for receipt of signals from a source device;  
 switching means associated with the ultimate destination device for transmitting signals to the ultimate destination device;  
 second identifying means for identifying the switching means associated with the ultimate destination device;  
 route determining means for determining a route of signal transmission from the source device to the switching means;  
 first transmitting means for transmitting the encoded signal at the native rate from the source device to the switching means along the route of signal transmission;  
 signal characteristic determining means for determining the particular characteristics of signals that are capable of being recognized by the ultimate destination device;  
 second analyzing means for analyzing characteristics of the encoded signal and the particular characteristics of signals that are capable of being recognized by the ultimate destination device;  
 re-encoding means for re-encoding the encoded signal at the switching means into a re-encoded signal having characteristics substantially the same as the particular characteristics of signals that are capable of being recognized by the ultimate destination device;  
 second transmitting means for transmitting one of the encoded signal or the re-encoded signal to the ultimate destination device; and  
 decision means for deciding whether said second transmitting transmits the encoded signal or the re-encoded signal based upon predetermined criteria.

9. The apparatus of claim 8, wherein the characteris-



tics of the encoded signal being analyzed by said second analyzing means is the transmission rate and the particular characteristics of signals that are capable of being recognized by the ultimate destination device being analyzed by said second analyzing means is a rate of signal reception. 5

10. The apparatus of claim 8, wherein the predetermined criteria considered by said decision means is whether the transmission rate of the encoded signal is substantially the same as a rate of signal reception of the ultimate destination device. 10

11. The apparatus of claim 8, further comprising: 15

third transmitting means for transmitting an answer signal to the source device in response to receipt by the ultimate destination device of one of the encoded signal and the re-encoded signal to indicate to the source device that the ultimate destination device is capable of receiving the signal from the source device; 20  
connection means for establishing a communications connection between the source device and ultimate destination device along the route of signal transmission. 25

30

35

40


45

50

55



FIG. 1

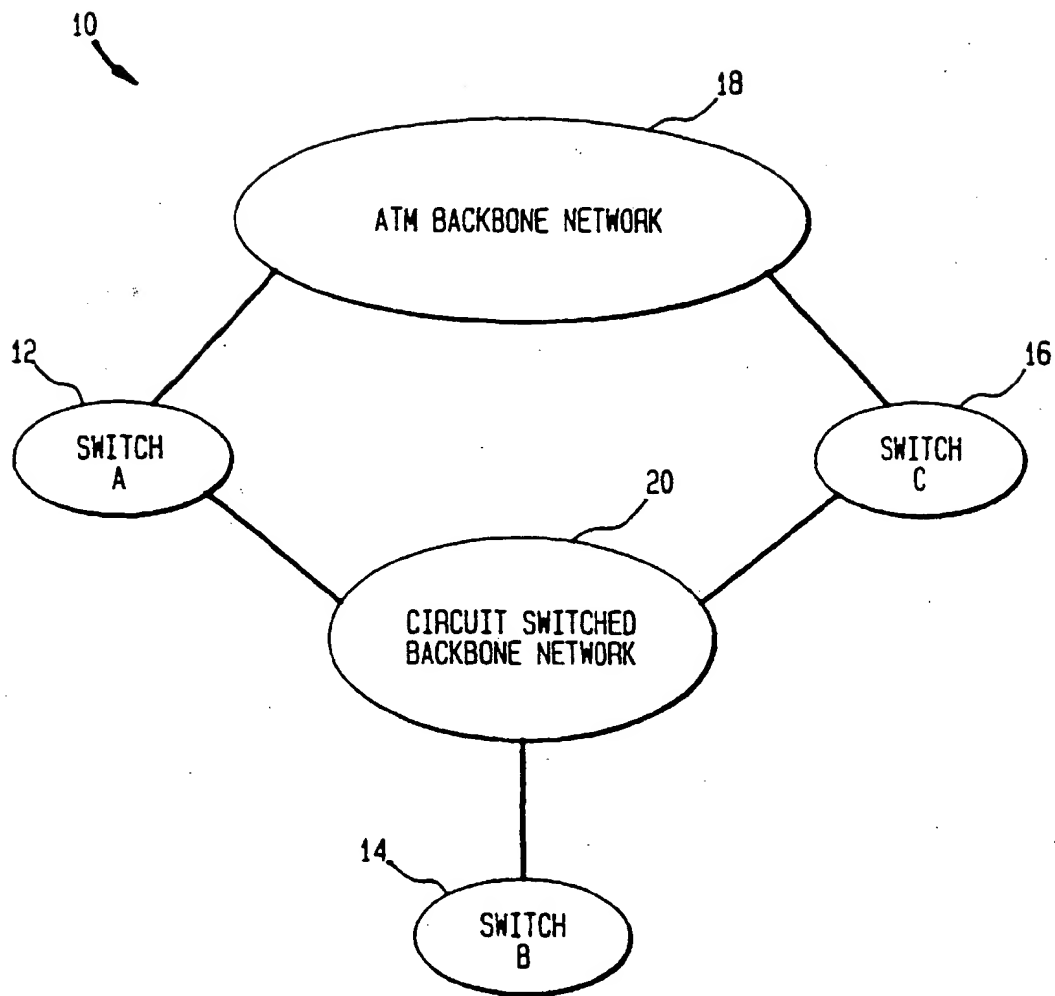

**FIG. 2**

ARCHITECTURAL COMPONENTS  
FOR AN END-TO-END CONNECTION

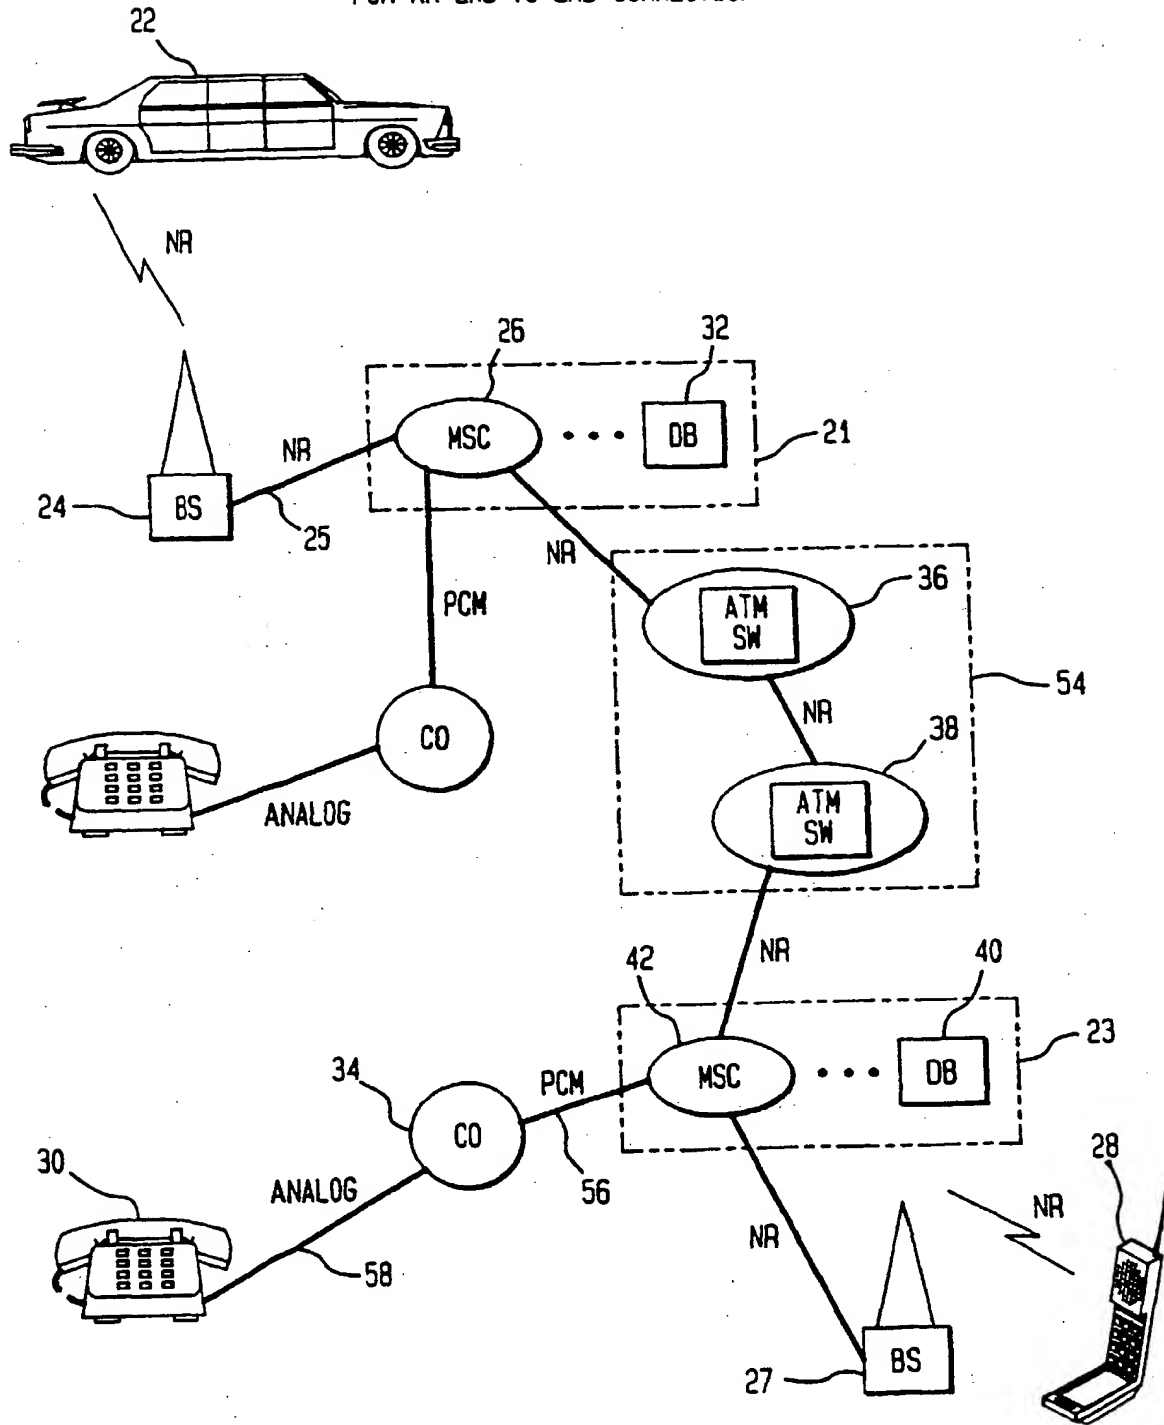


FIG. 3


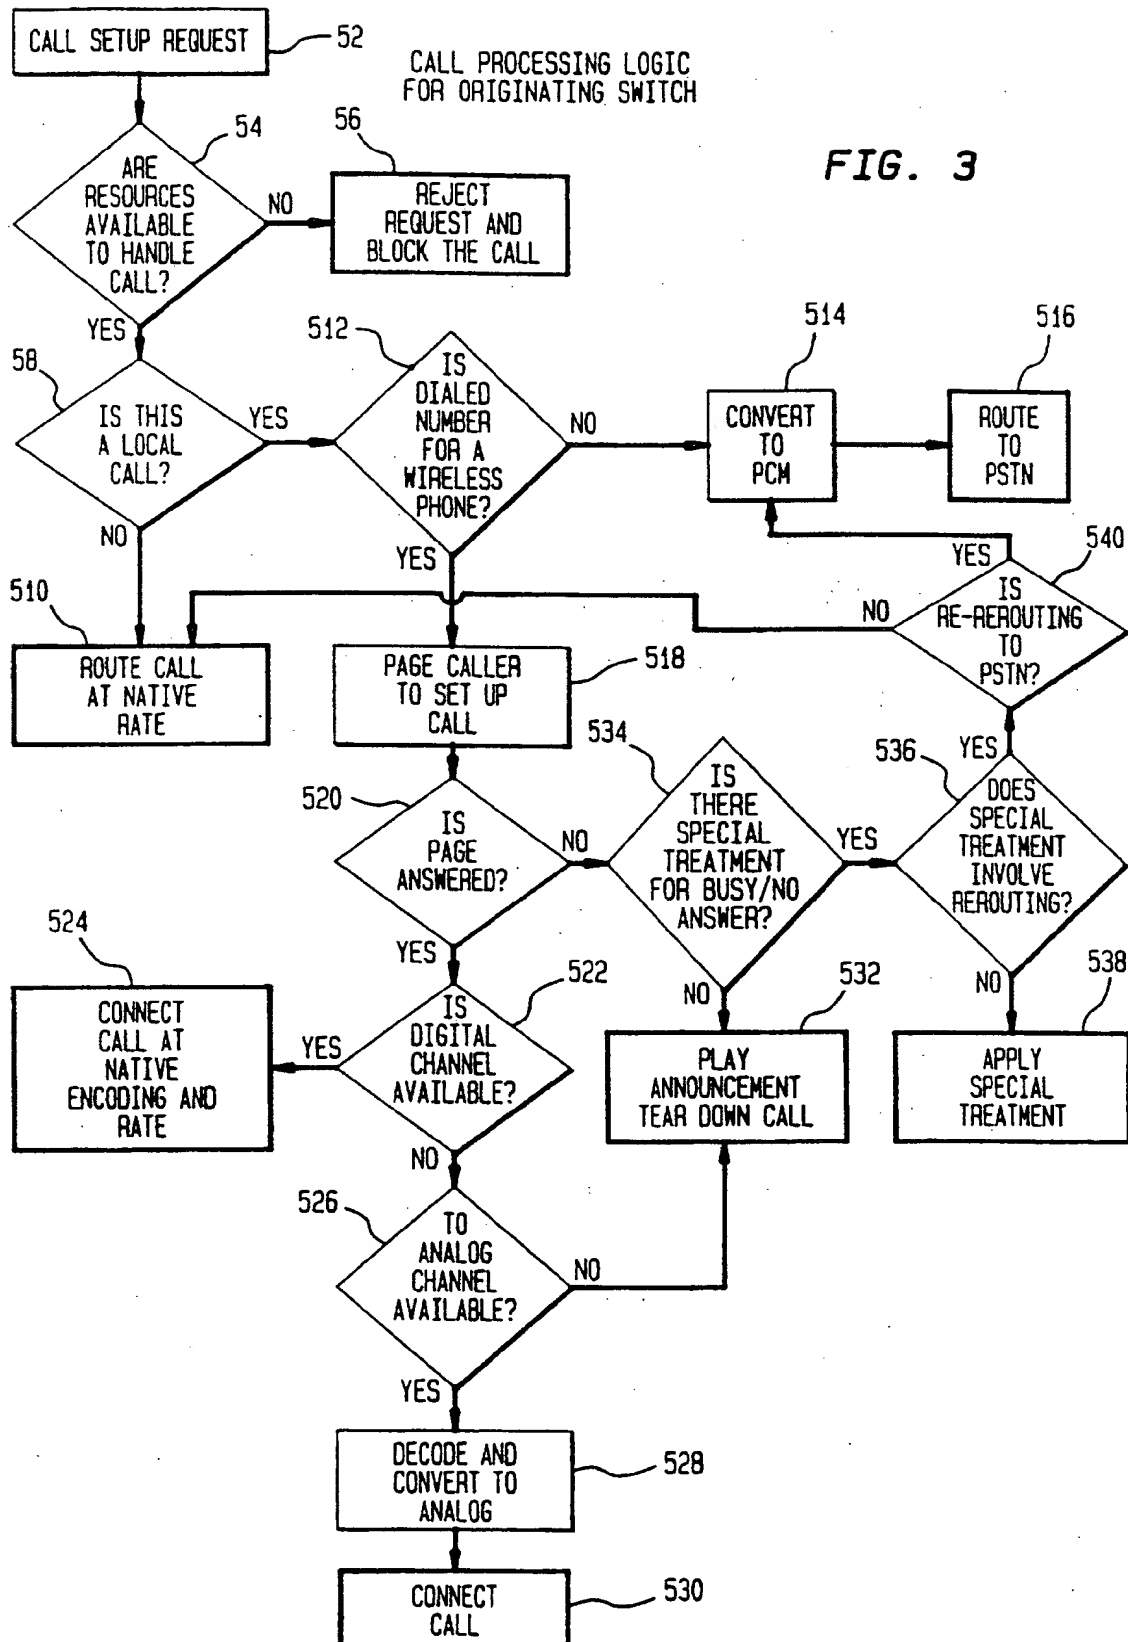


FIG. 4



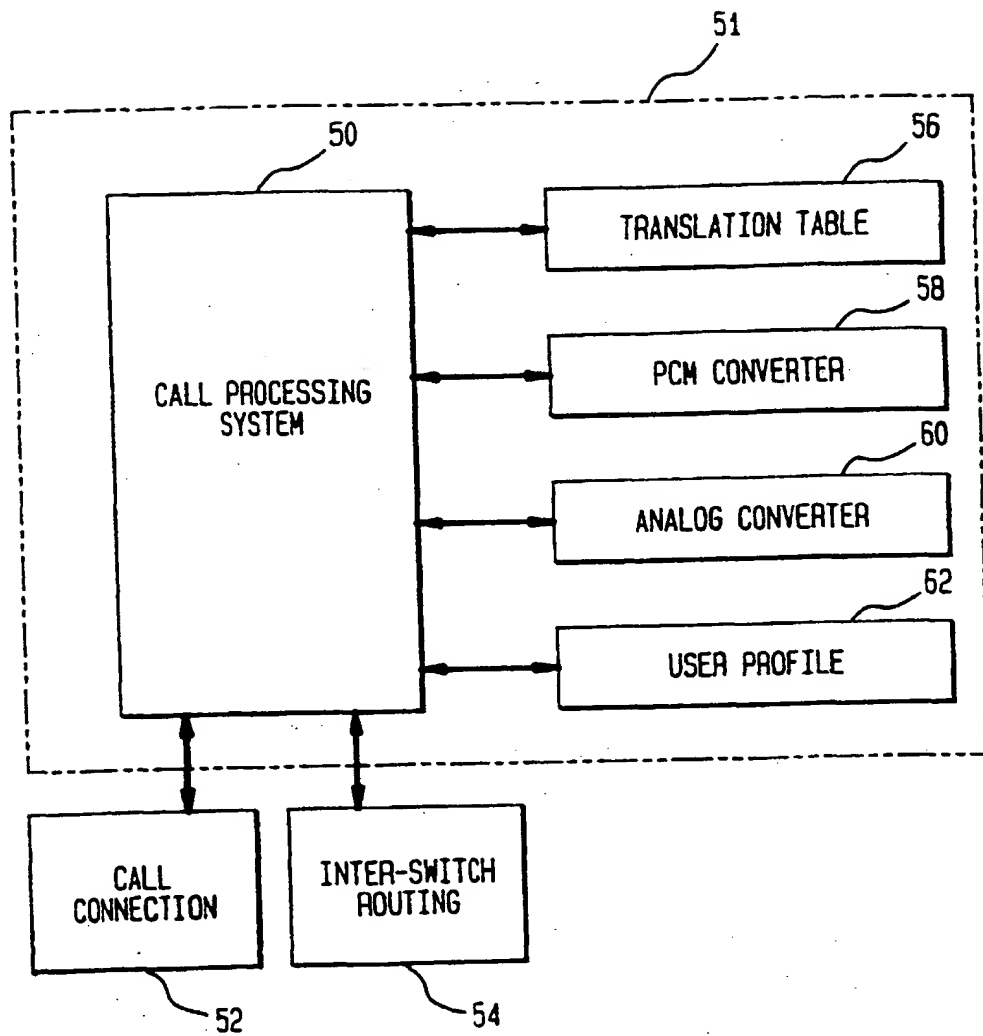

**European Patent Office**

1  
 2  
 3  
 4  
 5  
 6  
 7  
 8  
 9  
 10  
 11  
 12  
 13  
 14  
 15  
 16  
 17  
 18  
 19  
 20  
 21  
 22  
 23  
 24  
 25  
 26  
 27  
 28  
 29  
 30  
 31  
 32  
 33  
 34  
 35  
 36  
 37  
 38  
 39  
 40  
 41  
 42  
 43  
 44  
 45  
 46  
 47  
 48  
 49  
 50  
 51  
 52  
 53  
 54  
 55  
 56  
 57  
 58  
 59  
 60  
 61  
 62  
 63  
 64  
 65  
 66  
 67  
 68  
 69  
 70  
 71  
 72  
 73  
 74  
 75  
 76  
 77  
 78  
 79  
 80  
 81  
 82  
 83  
 84  
 85  
 86  
 87  
 88  
 89  
 90  
 91  
 92  
 93  
 94  
 95  
 96  
 97  
 98  
 99  
 100  
 101  
 102  
 103  
 104  
 105  
 106  
 107  
 108  
 109  
 110  
 111  
 112  
 113  
 114  
 115  
 116  
 117  
 118  
 119  
 120  
 121  
 122  
 123  
 124  
 125  
 126  
 127  
 128  
 129  
 130  
 131  
 132  
 133  
 134  
 135  
 136  
 137  
 138  
 139  
 140  
 141  
 142  
 143  
 144  
 145  
 146  
 147  
 148  
 149  
 150  
 151  
 152  
 153  
 154  
 155  
 156  
 157  
 158  
 159  
 160  
 161  
 162  
 163  
 164  
 165  
 166  
 167  
 168  
 169  
 170  
 171  
 172  
 173  
 174  
 175  
 176  
 177  
 178  
 179  
 180  
 181  
 182  
 183  
 184  
 185  
 186  
 187  
 188  
 189  
 190  
 191  
 192  
 193  
 194  
 195  
 196  
 197  
 198  
 199  
 200  
 201  
 202  
 203  
 204  
 205  
 206  
 207  
 208  
 209  
 210  
 211  
 212  
 213  
 214  
 215  
 216  
 217  
 218  
 219  
 220  
 221  
 222  
 223  
 224  
 225  
 226  
 227  
 228  
 229  
 230  
 231  
 232  
 233  
 234  
 235  
 236  
 237  
 238  
 239  
 240  
 241  
 242  
 243  
 244  
 245  
 246  
 247  
 248  
 249  
 250  
 251  
 252  
 253  
 254  
 255  
 256  
 257  
 258  
 259  
 260  
 261  
 262  
 263  
 264  
 265  
 266  
 267  
 268  
 269  
 270  
 271  
 272  
 273  
 274  
 275  
 276  
 277  
 278  
 279  
 280  
 281  
 282  
 283  
 284  
 285  
 286  
 287  
 288  
 289  
 290  
 291  
 292  
 293  
 294  
 295  
 296  
 297  
 298  
 299  
 300  
 301  
 302  
 303  
 304  
 305  
 306  
 307  
 308  
 309  
 310  
 311  
 312  
 313  
 314  
 315  
 316  
 317  
 318  
 319  
 320  
 321  
 322  
 323  
 324  
 325  
 326  
 327  
 328  
 329  
 330  
 331  
 332  
 333  
 334  
 335  
 336  
 337  
 338  
 339  
 340  
 341  
 342  
 343  
 344  
 345  
 346  
 347  
 348  
 349  
 350  
 351  
 352  
 353  
 354  
 355  
 356  
 357  
 358  
 359  
 360  
 361  
 362  
 363  
 364  
 365  
 366  
 367  
 368  
 369  
 370  
 371  
 372  
 373  
 374  
 375  
 376  
 377  
 378  
 379  
 380  
 381  
 382  
 383  
 384  
 385  
 386  
 387  
 388  
 389  
 390  
 391  
 392  
 393  
 394  
 395  
 396  
 397  
 398  
 399  
 400  
 401  
 402  
 403  
 404  
 405  
 406  
 407  
 408  
 409  
 410  
 411  
 412  
 413  
 414  
 415  
 416  
 417  
 418  
 419  
 420  
 421  
 422  
 423  
 424  
 425  
 426  
 427  
 428  
 429  
 430  
 431  
 432  
 433  
 434  
 435  
 436  
 437  
 438  
 439  
 440  
 441  
 442  
 443  
 444  
 445  
 446  
 447  
 448  
 449  
 450  
 451  
 452  
 453  
 454  
 455  
 456  
 457  
 458  
 459  
 460  
 461  
 462  
 463  
 464  
 465  
 466  
 467  
 468  
 469  
 470  
 471  
 472  
 473  
 474  
 475  
 476  
 477  
 478  
 479  
 480  
 481  
 482  
 483  
 484  
 485  
 486  
 487  
 488  
 489  
 490  
 491  
 492  
 493  
 494  
 495  
 496  
 497  
 498  
 499  
 500  
 501  
 502  
 503  
 504  
 505  
 506  
 507  
 508  
 509  
 510  
 511  
 512  
 513  
 514  
 515  
 516  
 517  
 518  
 519  
 520  
 521  
 522  
 523  
 524  
 525

(11)

**EP 0 783 217 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
28.07.1999 Bulletin 1999/30

(51) Int. Cl.<sup>6</sup>: **H04L 12/46**, H04Q 7/24,  
H04J 3/22

(43) Date of publication A2:  
09.07.1997 Bulletin 1997/28

(21) Application number: 96308951.1

(22) Date of filing: 10.12.1996

(84) Designated Contracting States:  
DE FR GB IT SE

(30) Priority: 02.01.1996 US 581830

(71) Applicant:  
LUCENT TECHNOLOGIES INC.  
Murray Hill, New Jersey 07974-0636 (US)

(72) Inventors:

- Miska, Richard A.  
Belle Mead, New Jersey 08502 (US)
- Myers, Albert E.  
Matawan, New Jersey 07747 (US)

(74) Representative:


**Buckley, Christopher Simon Thirsk**  
**Lucent Technologies (UK) Ltd,**  
**5 Mornington Road**  
**Woodford Green, Essex IG8 0TU (GB)**

**(54) Method and apparatus for transport of communication signals over a public network**

(57) In a method and apparatus for transmitting signals at different rates between an originating device (22) and a destination device (e.g.30) the originating device generates a communication signal, including routing data, for transmitting the communication signal at a native rate associated with the originating device. The communication signal is received by a switch (21) which analyzes the routing data of the signal to identify transmission rates recognizable by the destination device and, if necessary, a transmission path for routing the signal across a backbone network (54) at the native rate. The system then determines whether to re-encode the signal for direct transmission at a different rate recognizable by the destination device, or to maintain the signal at the native rate for transmission either directly to the destination device or across the backbone network. The signal is then transmitted. A destination switch (23) at the destination end analyzes the communication signal to determine the final destination point; if necessary, it re-encodes the communication signal for transmission at a rate which is recognizable by the final destination point, and then transmits the signal to the final destination (e.g.30).

**FIG. 2**

### ARCHITECTURAL COMPONENTS FOR AN END-TO-END CONNECTION

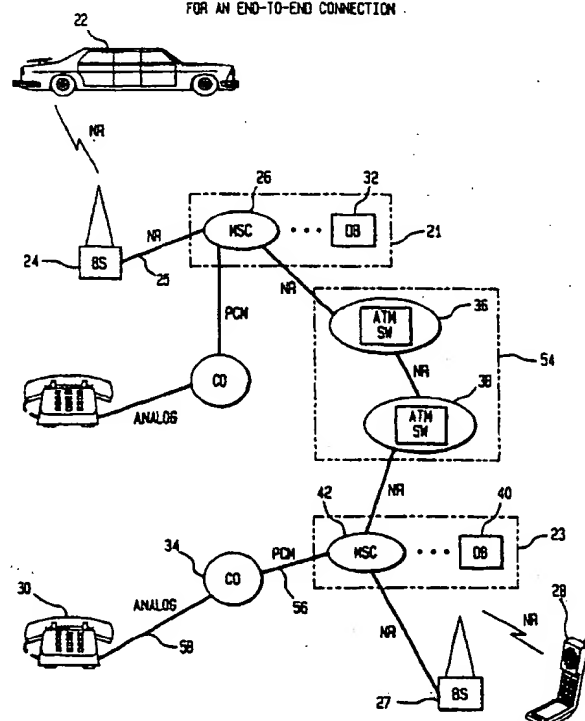



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 96 30 8951

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	WO 93 00778 A (PLESSEY TELECOMM) 7 January 1993	1,2,4-6, 8-11	H04L12/46 H04Q7/24 H04J3/22
A	* the whole document *	3,7	
X	EP 0 605 311 A (ALCATEL RADIOTELEPHONE) 6 July 1994 * column 2, line 28 - column 3, line 32 * * column 4, line 27 - column 5, line 21 * * figure 1 *	1,2,4, 8-10	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H04Q H04L H04J
The present search report has been drawn up for all claims.			
Place of search		Date of completion of the search	Examiner
THE HAGUE		8 June 1999	Barel, C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P24C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 96 30 8951

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-06-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9300778 A	07-01-1993	DE 69228729 D	29-04-1999
		EP 0544884 A	09-06-1993
		JP 6500911 T	27-01-1994
EP 0605311 A	06-07-1994	FR 2700087 A	01-07-1994
		AU 669940 B	27-06-1996
		AU 5214493 A	14-07-1994
		CA 2112514 A	01-07-1994
		FI 935884 A	01-07-1994
		JP 6319167 A	15-11-1994
		NO 934858 A	01-07-1994
		US 5497396 A	05-03-1996



**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☒ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**